

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
30 October 2003 (30.10.2003)

PCT

(10) International Publication Number
WO 03/089362 A1

(51) International Patent Classification⁷: **B67B 7/16.**
7/00, G09F 23/06

Chang [KR/KR]; Samick apartment 503-1003, 15
Myungil-1dong, Kangdong-ku, Seoul 134-824 (KR).

(21) International Application Number: PCT/KR03/00765

(74) Agent: **LEE, Ki-Sung**; 4th Floor Dongbo Building, 647-8,
Yeoksam-dong, Gangnam-gu, Seoul 135-080 (KR).

(22) International Filing Date: 16 April 2003 (16.04.2003)

(25) Filing Language: Korean

(81) Designated States (*national*): JP, US.

(26) Publication Language: English

(84) Designated States (*regional*): European patent (AT, BE,
BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU,
IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

(30) Priority Data:
20-2002-0011510 16 April 2002 (16.04.2002) KR

(71) Applicant (*for all designated States except US*): **KOREA
ALPHALINE CO. LTD.** [KR/KR]; 435-5 Dunchon-dong,
Kangdong-ku, Seoul 134-060 (KR).


Published:
— with international search report

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **WANG, Soo**

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PUSH OPENER

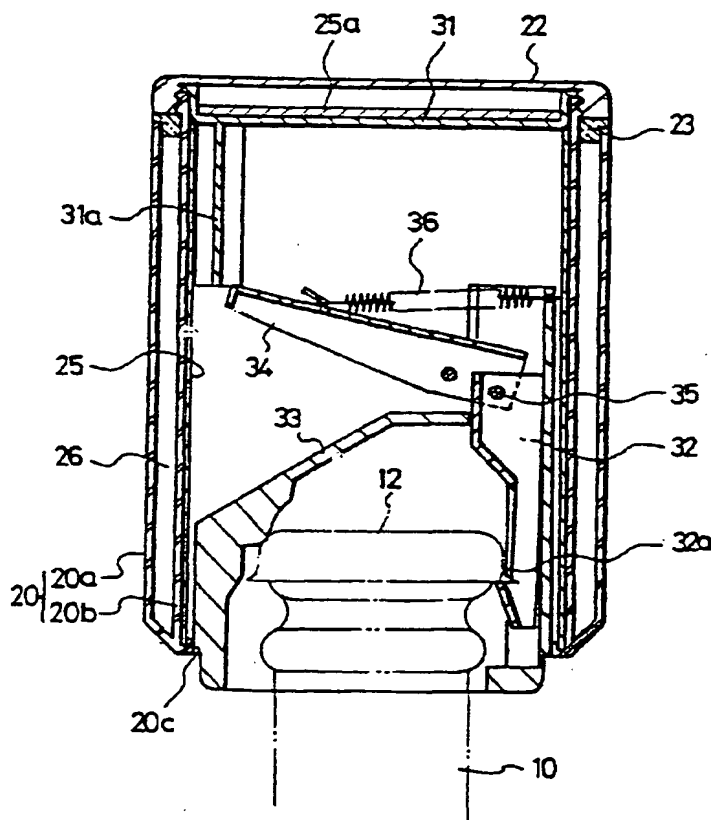

(57) Abstract: Disclosed is a push opener suitable for removing a cap (12) fitted to an opening of a bottle (10). The push opener includes an intermediate lid (31) having an elongate arm, a first operation arm (32) formed with an engagement projection to be engaged with a lower end of the bottle cap, a second operation arm (33) for supporting an upper end of the bottle cap, an inclined arm (34) hinged to the first operation arm (32) and positioned directly below the elongate arm of the intermediate lid (31), to be pivoted and raise the first operation arm (32) when an opener body (20) is pushed downward, a spring (36) for returning the pivoted inclined arm (34) to its original position, an inner housing (20b) formed of transparent material, an outer housing formed of transparent material and positioned radially outward of the inner housing, and a first advertising section (25) provided on the inner housing (20b) or the outer housing (20d).